

PYROVIEW 380 compact

Industrial Infrared Cameras





Features

- Precise non-contact temperature measurement over the range $-20\text{ }^{\circ}\text{C}$ to $1250\text{ }^{\circ}\text{C}$ in different spectral ranges
- Measurement frequency 50 frames per second
- Compact housing (to IP 54 Standard)
- Uncooled microbolometer with 384×288 pixels
- Optics with motor or manual focussing
- Real-time data acquisition via Gigabit or Fast Ethernet
- Option of stand-alone operation without computer
- Triggered measurements
- Alarm and threshold monitoring
- Large dynamic range
- 16 bit A/D converter
- Customized system solutions with modified hardware and software
- No US export license necessary

Applications

PYROVIEW compact cameras provide instant non-contact measurement of 2D temperature distributions with high thermal and spatial resolution. All models are specially designed for long-term use in fixed-mount applications.

For general measurements the spectral ranges $8\text{ }\mu\text{m}$ to $14\text{ }\mu\text{m}$ and $3\text{ }\mu\text{m}$ to $5\text{ }\mu\text{m}$ are available. The spectral range $4.8\text{ }\mu\text{m}$ to $5.2\text{ }\mu\text{m}$ has been specially designed for measurements on glass.

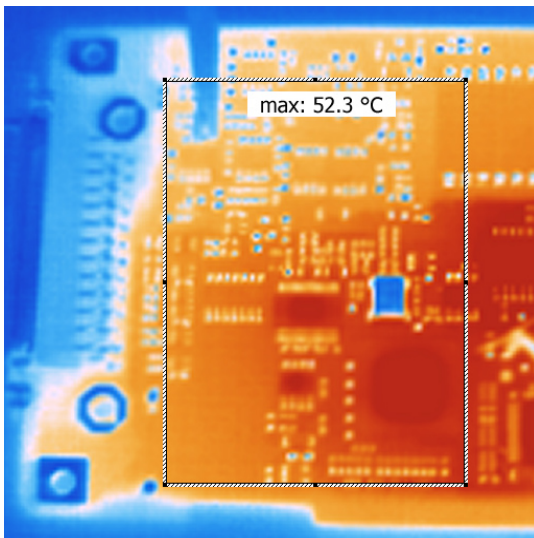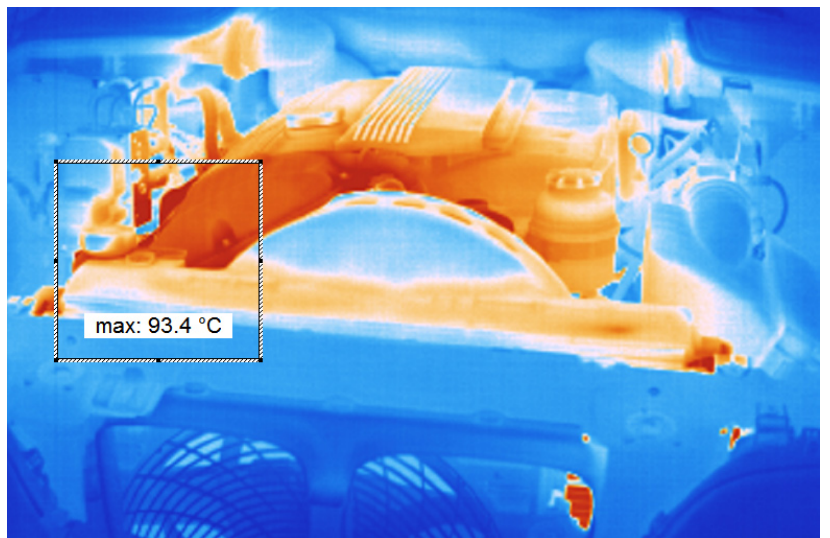

Software

The powerful online software PYROSOFT for Windows® allows you to control the camera and record, view, manipulate and store the measured data. Specific features are:

- Real-time data recording
- Definition of zones and monitoring of alarm thresholds
- Analysis of trends
- Data export (text, bitmap, video)
- Process control via PROFIBUS, analog and digital inputs, outputs, and other interfaces

A programming interface (Windows®-DLL) is available for system integration.

PYROVIEW 380 compact

Industrial Infrared Cameras

Model	Spectral Range ¹	Temperature Meas. Range ¹	NETD ²	Field of View ^{1,4}
PYROVIEW 380 compact (384 × 288 pixels)				
PYROVIEW 380L compact	8 μm to 14 μm	Range 1: -20 °C to 120 °C, Range 2: 0 °C to 500 °C	0.08 K (30 °C, 50 Hz)	30° × 23°, 60° × 47°, 44° × 34°, 22° × 16°, 11° × 8°, 7° × 5° ³ , macro 60 μm
PYROVIEW 380M compact	3 μm to 5 μm	Range 1: 100 °C to 300 °C, Range 2: 200 °C to 500 °C	0.5 K (200 °C, 50 Hz)	30° × 23°, 51° × 40°, 15° × 12°
PYROVIEW 380G compact	4.8 μm to 5.2 μm	Range 1: 200 °C to 500 °C, Range 2: 400 °C to 1250 °C	1 K (300 °C, 50 Hz)	30° × 23°, 51° × 40°, 15° × 12°
PYROVIEW 380F compact	3.9 μm	600 °C to 1250 °C	1 K (600 °C, 50 Hz)	30° × 23°, 51° × 40°, 15° × 12°

Measurement Uncertainty²

2 K (measured temperature < 100 °C) or 2 % of the measured value in °C

Measurement Frequency⁵

internal 50 Hz, selectable: 50 Hz, 25 Hz, 12.5 Hz, ...

Response Time

internal 40 ms, selectable: 2/measurement frequency

Interfaces

Fast Ethernet (real time, 50 Hz), optional fibre optics, electrically isolated digital inputs (trigger) and digital outputs (alarm)

Power Supply

12 V to 36 V DC, typical 4 VA to 10 VA

Camera Housing

Aluminium compact housing IP 54, optional with industrial housing IP 65 with water cooling system and air purge, weatherproof housing with pan-tilt-unit or ATEX housing

Dimensions/Weight

85 mm (W) × 175 mm (D) × 107 mm (H), without lens and connectors, approx. 1.6 kg

Camera Operating Temperature Range

-10 °C to 50 °C

Storage Conditions

-20 °C to 70 °C, rel. humidity 95 % max

Software

Control and imaging software PYROSOFT for Windows®, customized modifications on request

¹ Others available. ² Specification for black body reference and ambient temperature 25 °C. ³ NETD <0.2 K (30 °C, 50 Hz). ⁴ Optics with motor or manual focussing.

⁵ Export version < 9 Hz available. Technical details are subject to change without notice. November 2011.